


**Par Angle/Flat Well Light**

**PAR ANGLE/FLAT WELL LIGHT**

**BB-O3A & BB-O3F LED**



**BB-O3A WITH BA16**

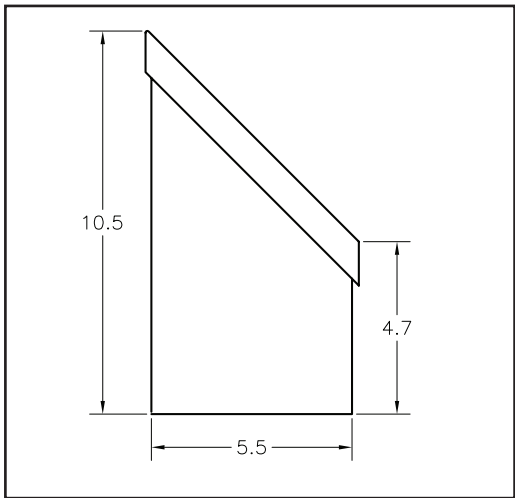

**STANDARD PAR 36 ANGLE/  
FLAT WELL LIGHT**

bb-03a LED & bb-03f LED

*Cleverly designed by professional lighting experts to provide strong light yet remain practically unnoticeable, this well light is adjustable for brightness and may be used to graze or fully highlight your home's lovely exterior, or uplight a striking tree.*

- LAMP:** 6 WATT PAR36 LED
- EQUIVALENT:** 35 WATT PAR36 HALOGEN
- MATERIAL:** PVC
- BEAM SPREAD:** SPOT, WFL, VWFL
- AVAIL 10 WATT (580 LUMENS) HIGH OUTPUT**
- SPECIFICATIONS:** 380 LUMENS
- 3,000K
- 80+ CRI
- IP 67
- OPTIONAL:** GLASS LENS (SHOWN WITH BA16)
- BA16MBR ANT BRASS



**BB-O3F WITH BA14BR**

| distance | Ø of beam | fc             |
|----------|-----------|----------------|
| 20       | 10.3      | 5              |
| 16       | 8.3       | 6.5            |
| 12       | 5         | 9              |
| 8        | 3.1       | 24             |
| 4        | 2.6       | 85             |
|          |           | <b>6</b>       |
|          |           | <b>wattage</b> |

flood

| distance | Ø of beam spot | fc             |
|----------|----------------|----------------|
| 40       | 8.7            |                |
| 36       | 6.6            |                |
| 32       | 5              | 1              |
| 25       | 4.2            | 2              |
| 24       | 3.6            | 3              |
| 20       | 3.1            | 5              |
| 16       | 2.5            | 10             |
| 12       | 1.2            | 20             |
| 5        | 0.8            | 70             |
| 4        | 0.6            | 190            |
|          |                | <b>6</b>       |
|          |                | <b>wattage</b> |

spot

